USER MANUAL ADDENDUM

Shortening | Grouping | Reset & Pairing


This addendum supplements the Malli Aurora Smart RGBIC LED Strip Light User Manual. Please retain both documents for future reference.

1. Shortening the LED Strip


Important: Always measure the required length from the connector pin side. The strip must only be cut at the marked cut lines across the copper pads.



Step 1 - Measure from the connector pin side.

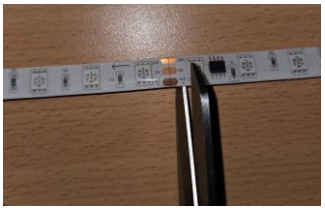

Step 2 - Locate a marked cut line at the copper pads (approximately every 10 cm).

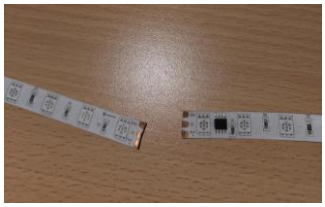


Step 3 - Use clean, sharp scissors and cut exactly along the marked line.

After cutting: avoid bending or twisting the strip. Cover the exposed cut end with insulation tape to help protect the copper pads from dust or moisture.


Update the strip length in Smart Life



1. Open the strip in Smart Life and tap the settings/options icon.

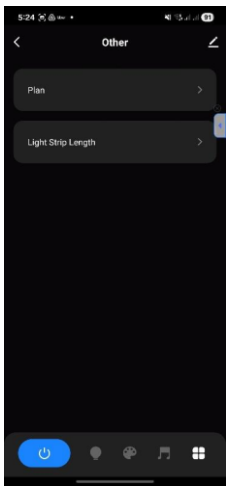

2. Choose “Light Strip Length”.

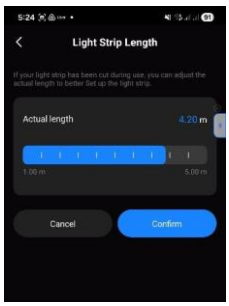


3. Set the actual length and tap Confirm.

Updating the app length helps dynamic scenes remain correctly spaced and synchronised after shortening.

2. Creating a Group in the Smart Life App

Use grouping when you want two Malli Aurora strips to respond together to the same colour, scene or combination.


Before you start: Make sure both LED strips have already been added to Smart Life and are visible on the app home screen.

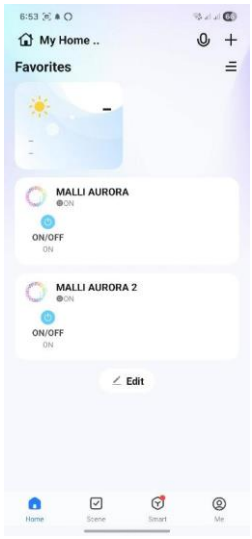


1. Confirm both strips are visible on the Smart Life home screen.




2. Open one Malli Aurora strip, then tap the pencil/edit icon in the top-right corner.

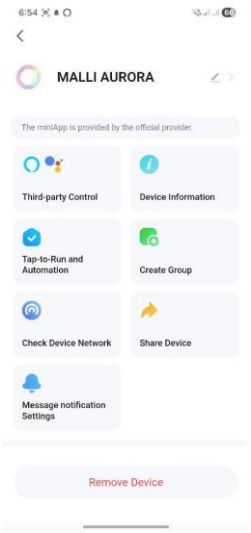

3. Select Create Group.

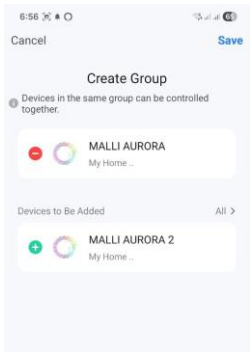

4. Select the other Malli Aurora strip from Devices to Be Added.

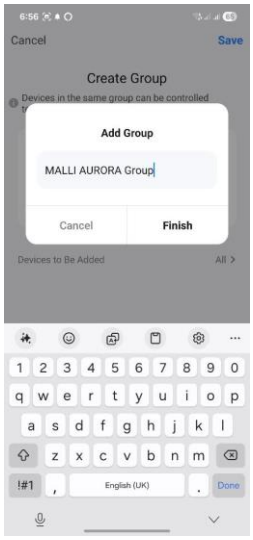

5. Tap Save, enter a group name, then tap Finish.



6. Open the new group and control both strips together.


Once the group is created, selecting a scene, colour or combination for the group will apply it to both strips in sync.

3. Resetting the Strip and Returning It to Pairing Mode

Use either reset method below if you need to reconnect the strip to Smart Life.

Method 1 - Controller button (recommended)

With the strip powered on, press and hold the On/Off button on the controller for 5 seconds.

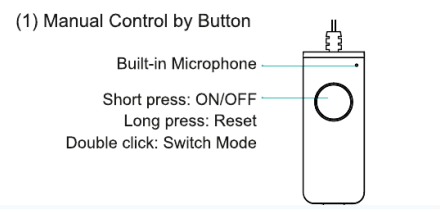

Method 2 - Power cycle

Switch the strip on and off 5 times.


What to look for

After a successful reset, the blue light will “breathe” (pulse). This means the strip is ready to pair again.


Pairing mode lasts for 3 minutes. If pairing is not completed, reset the strip again to restart pairing mode.

Pair the strip again in Smart Life


Ensure Bluetooth is on and your Wi-Fi signal is stable. In Smart Life, follow the device-add process, enter the Wi-Fi password when prompted, and wait for connection to complete.

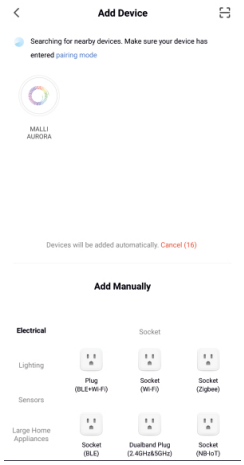

1. Smart Life searches for the nearby Malli Aurora device.

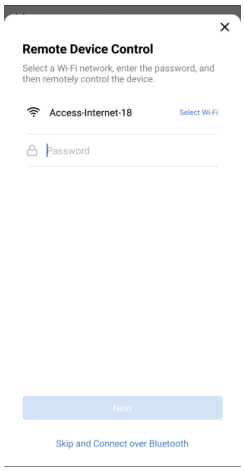

2. Enter/confirm the Wi-Fi password when prompted.

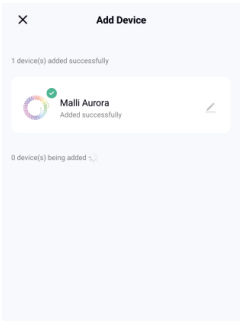

3. When pairing succeeds, the device is added and ready to use.

Pairing indication: the breathing effect stops when the device is found. After successful pairing, the manual states that the mixed RGB white light remains on.

For the most up-to-date instructions, visit www.samraj.tech